

Toroidal Current Transformers

Special Features:

- Accuracy classes from 0.2 to 3
- Protective classes ranging from P5 to P30
- Sizes ranging from 10 mm up to 300 mm
- Currents on primary side from 15 - 8000 A
- Operating frequency: 50/60 Hz
- Compliance:
 - IEC 61869-1
 - IEC 61869-2
 - IEC 61869-10
 - RoHS and REACH
- Low profile
- Operating ambient temperature: -45°C to 85°C
- Accuracy measurement on Omicron CT Analyzer meter



Figure 1. General view of products

Typical Applications:

- Switchgear current measurements
- PCB mounted current sensor
- Energy meters current measurement

For samples or custom solutions please contact directly:

inquiry@sma-magnetics.com

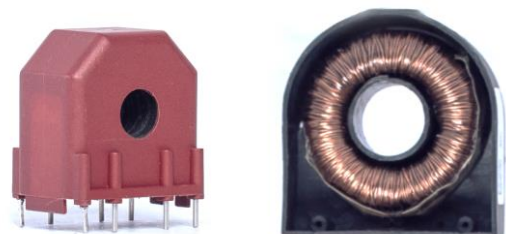


Figure 2. General view PCB mounded products